

PT6-S1-4103L

Description

The PT6-S1-4103L of Small Form Factor Pluggable (SFP) transceiver module is specifically designed for high performance integrated duplex data link over single mode optical fiber. The high-speed laser diode and photo diode are provided as a light source and a detector, respectively. Digital diagnostics monitoring information and detailed product information for the host equipment is accessed by the 2-wire serial CMOS EEPROM protocol. It complies with SFP MSA, SONET/SDH standards, Class 1 laser products, EN60825, and EN60950.



Features

- RoHS Compliant
- Operation Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 1310nm uncooled FP LD
- 10Km link distance_(indicative only)
- Duplex LC connector for single mode fiber
- Hot pluggable
- Metal enclosure, low EMI
- Single 3.3V power supply
- Low Power Dissipation
- 8472 Compliant

Applications

- Metro Access Rings
- Point-to-Point networking
- 1G/2G Fiber Channel
- 2.5Gbps data rate
- OC-48 IR-1/OC-12/ OC-3
- SDH STM L-16.1/STM-4/STM-1

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	T_s	-55		95	$^{\circ}\text{C}$	
Supply Voltage	V_{ccT} V_{ccR}	0		5.5	V	
Relative Humidity	RH	0		85	%	



PT6-S1-4103L

www.palconnusa.com

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Temperature	T _{OP}	-40		85	°C	Case temperature
Supply Voltage	V _{CC} T,R	3.1	3.3	3.5	V	
Supply Current	I _{TX} +I _{RX}		200	300	mA	

Transmitter Electro-Optical Interface (T_C = -40°C~85°C, V_{cc}T, R=3.1V<V_{CC}<3.5V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Transmitter Differential Input Voltage	TD +/-	400		2000	mVp-p	A
Optical Output Power	P _O	-8		-3	dBm	A
Optical Extinction Ratio	E _R	6			dB	A
Center Wavelength	λ _C	1270	1310	1350	nm	A
Spectral Width(-20dB)	Δλ			<2	nm	A
Tx_Fault - High	V _{Fault_H}	2		V _{CC}	V	A
Tx_Fault - Low	V _{Fault_L}	V _{ee}		V _{ee} +0.5	V	A
Tx_Disable - High	V _{Disable_H}	2		V _{CC}	V	A
Tx_Disable - Low	V _{Disable_L}	V _{ee}		V _{ee} +0.8	V	A

Notes:

A. All of data is measured at 2488Mbps, PRBS 2²³-1, NRZ.



PT6-S1-4103L

www.palconnusa.com

Receiver Electro-Optical Interface ($T_c = -40^{\circ}\text{C} \sim 85^{\circ}\text{C}$, V_{ccT} , $R=3.1\text{V} < V_{cc} < 3.5\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Receiver Differential Output Voltage	RD +/-	600	800		mV _{p-p}	
Receiver Overload	P _{INMAX}	-3			dBm	A,B
Receiver Sensitivity	P _{INMIN}			-20	dBm	A,B
Operating Center Wavelength	λ_c	1260		1620	nm	
Receiver LOS Assert Level	P _{RX_LOS A}	-35			dBm	B
Receiver LOS Deassert Level	P _{RX_LOS D}			-20	dBm	B
Receiver Loss of Signal Hysteresis		0.5	2		dB	B


Notes:

A. With BER better than or equal to 1×10^{-12} .

B. Measured in the center of the eye opening with $2^{23} - 1$ PRBS, NRZ at 2488Mbps.

PT6-S1-4103L

Pin Description

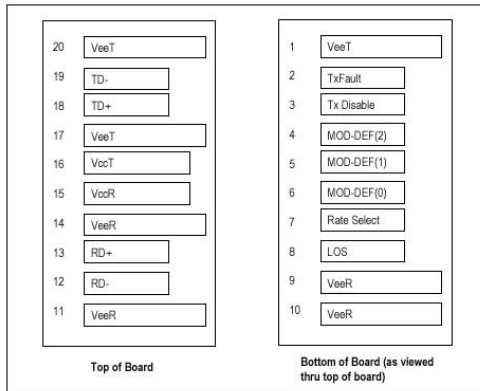

SFP Transceiver Electric Pad Layout

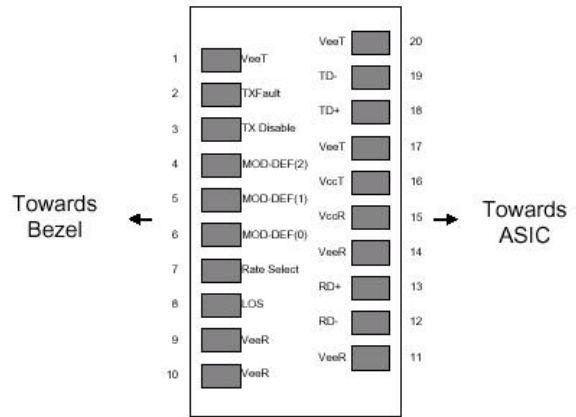


Diagram of Host Board Connector Block Pin Numbers and Names



PT6-S1-4103L

www.palconnusa.com


Pin No.	Pin Name	Function	Plug Seq.	Notes
1	V _{ee} T	Transmitter Ground	1	1
2	TX Fault	Transmitter Fault Indication	3	2
3	TX Disable	Transmitter Disable	3	3
4	MOD_DEF 2	Module Definition 2	3	4
5	MOD_DEF 1	Module Definition 1	3	4
6	MOD_DEF 0	Module Definition 0	3	4
7	Rate Select	Select between full or reduced receiver bandwidth	3	5
8	LOS	Loss of Signal	3	6
9	V _{ee} R	Receiver Ground	1	1
10	V _{ee} R	Receiver Ground	1	1
11	V _{ee} R	Receiver Ground	1	1
12	RD -	Inv. Receiver Data Out	3	
13	RD +	Receiver Data Out	3	
14	V _{ee} R	Receiver Ground	1	1
15	V _{cc} R	Receiver Power	2	
16	V _{cc} T	Transmitter Power	2	
17	V _{ee} T	Transmitter Ground	1	1
18	TD +	Transmitter Data In	3	
19	TD -	Inv. Transmitter Data In	3	
20	V _{ee} T	Transmitter Ground	1	1

Note:

- 1, Circuit ground is internally isolated from chassis ground
- 2, Open-Collector outputs, asserted when LD and/or APC function fail.
- 3, Disable when high voltage (>2.0V or Open)
- 4, Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 5.5V. MOD_DEF(0) pulls line low to indicate module is plugged in.
- 5, No connection required
- 6, LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 5.5V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

PT6-S1-4103L

Mechanical Dimensions (Units in mm)

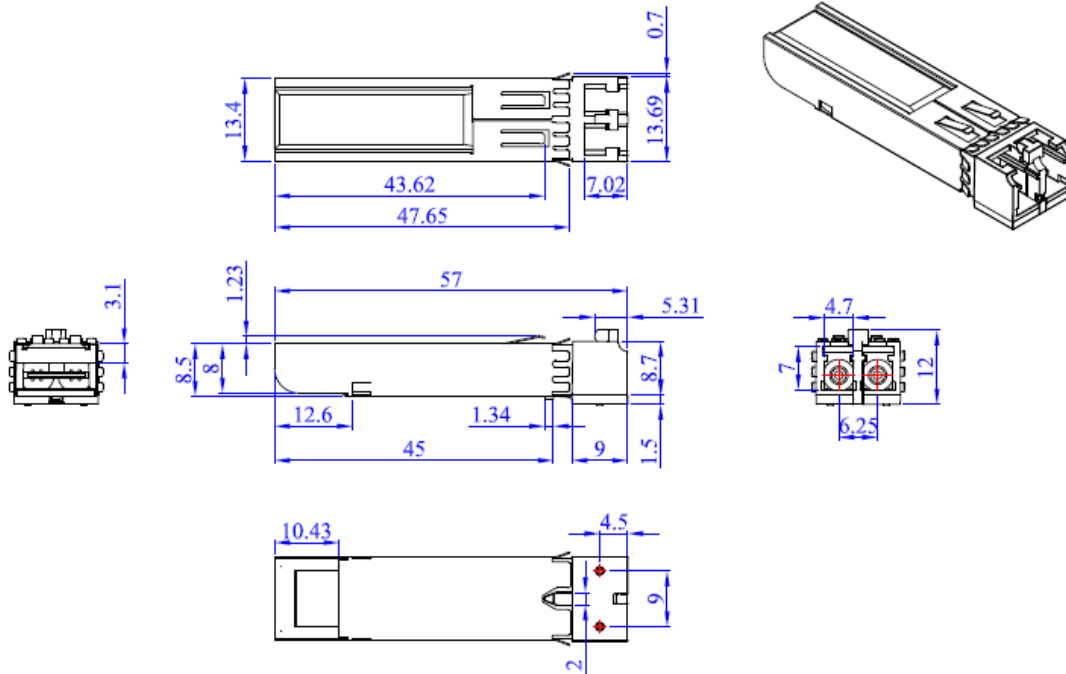

Application Circuit

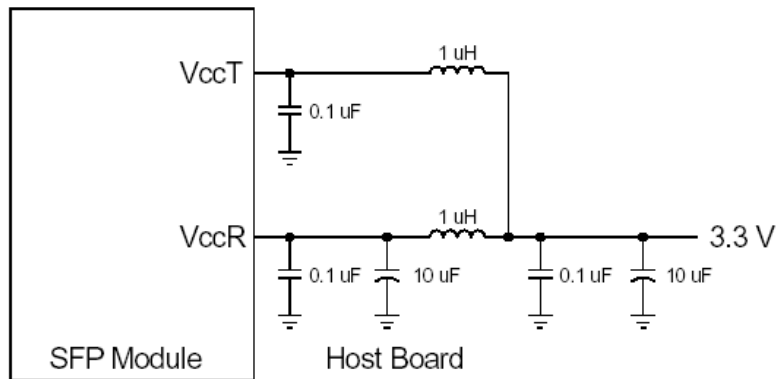


Figure 2A. Recommended Host Board Supply Filtering Network

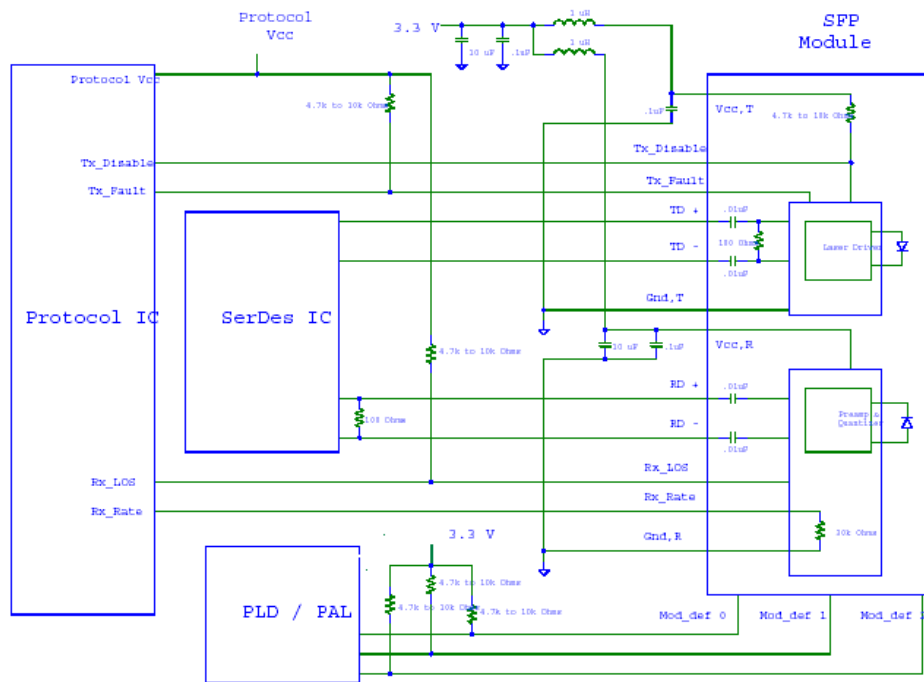


Figure 2B. Example SFP Host Board Schematic