



- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C




### Electrical Specifications @ 25°C

P/N	T/R ( ±2%)			OCL@100KHz 0.1V ( mH ±10%)	LL@100KHz 0.1V (μH MAX )	Hi-pot (Vrms)
	(4-2):(6-8)	(4-2):(10-8)	(6-8):(10-8)	(4-2)	(4-2),(tie 6+8+10)	PRI TO SEC
PP0128G	9.7 : 1	19.4 : 1	2 : 1	1.48	90	3000

### Dimensions (unit: inch/mm)

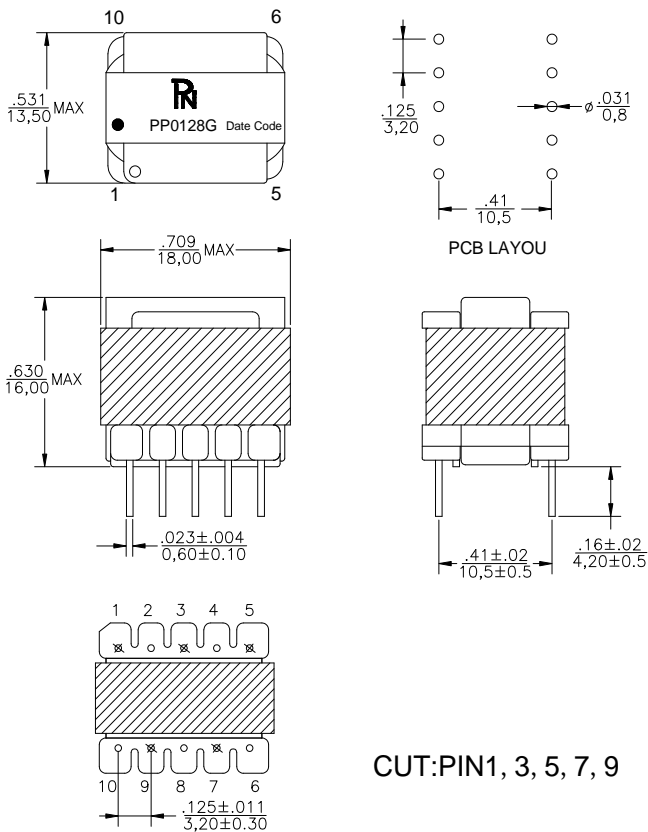

### Schematics

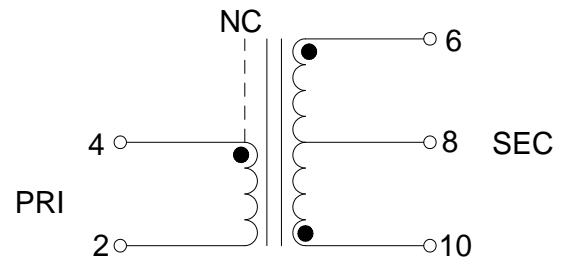

### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin, California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara, California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868