




- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 500 Vrms
- Recommended solder profile: Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C


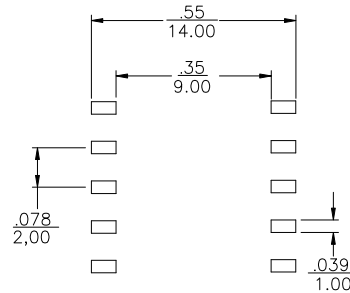


Electrical Specifications @ 25°C			
P/N	T/R (±2%) (1-3):(8-6):(10-8):(4-5)	OCL @ 10KHz 0.1V (μH ±20%) (1-3)	Hi-Pot PRI TO SEC
PD0922E	8:83:125:8	10	500


Dimensions (unit: inch/mm)



PCB LAYOUT

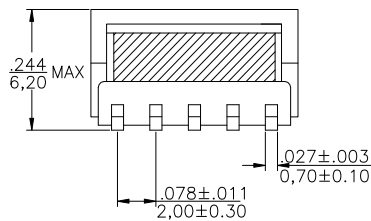

Schematics

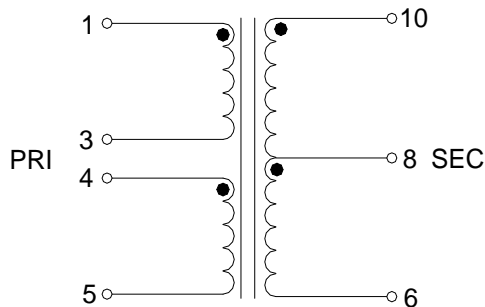

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin, California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara, California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868