



- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 500 Vrms
- Recommended solder profile: Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +85°C




Electrical Specifications @ 25°C						
P/N	T/R (±2%)	OCL@100KHz 0.1V (µH ±10%)	D.C.R (mΩ MAX)			Hi-pot (Vrms)
	(1-12) : (2-11):(3-10):(4-9):(5-8):(6-7)	(1,2,3-10,11,12)	(1-12)	(2-11)	(3-10)	PRI TO SEC
PD1265Y	1:1:1:2.5:1.5:2	3	30	30	30	500

Dimensions (unit: inch/mm)

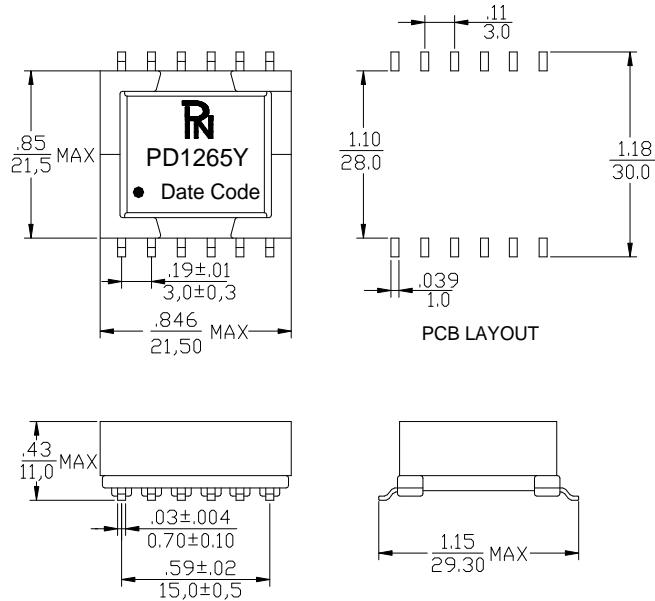

Schematics

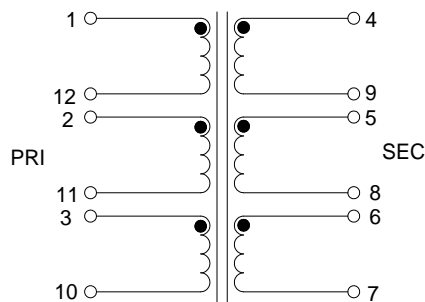

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868