


- Designed to meet UL 60950-1
- Ideally Used In POE Transformer
- Isolation 1500 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C




### Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@ 10KHz 0.1V (μH ±10%)	LL@ 10KHz 0.1V (μH MAX )	Hi-pot (Vrms)
		(3-5):(2-1):(8-7):(12,11-10,9)	(3-5)	(3-5)(tie1+2+7+8+9+10+11+12)
PD0156G	6:4:2:3	45	3	1500


### Additional Specifications

P/N	D.C.R (mΩ MAX)			
	(3-5)	(2-1)	(8-7)	(12,11-10,9)
PD0156G	190	1000	650	50

### Dimensions (unit: inch/mm)

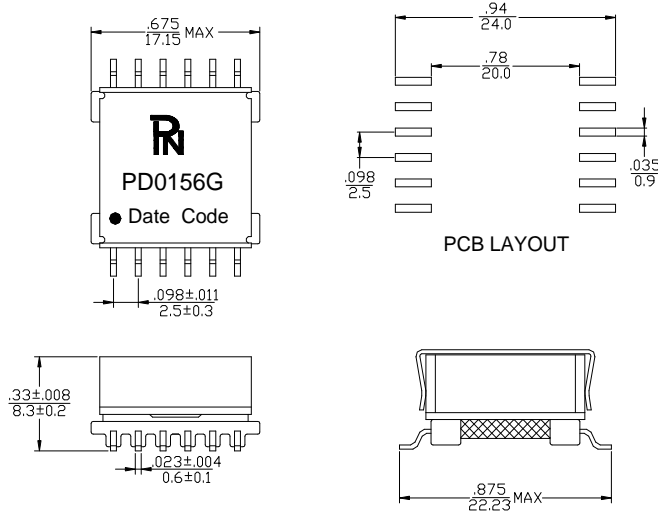

### Schematics

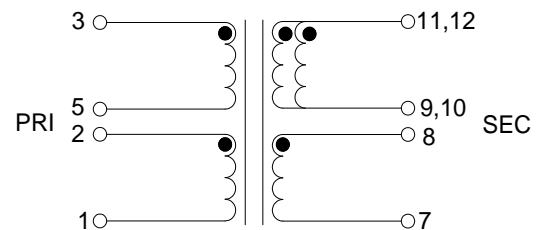

#### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

#### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868