

- Designed to meet UL 60950-1
- Ideally Used In POE Transformer
- Isolation 1500 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C




Electrical Specifications @ 25°C

P/N	T/R (±1%)	OCL@ 100KHz 0.1V (μH ±10%)	Hi-pot (Vrms)	
		(6,7-9,10):(5-3):(2-1)	(5-3)	PRI TO SEC
PD2319W	1:5:2.5	37	1500	


Additional Specifications

P/N	LL@ 100KHz 0.25V (μH MAX)	D.C.R (mΩ MAX)		
		(5-3) ,(tie1+2+6+7+9+10)	(5-3)	(2-1)
PD2319W	1	89	84	62

Dimensions (unit: inch/mm)

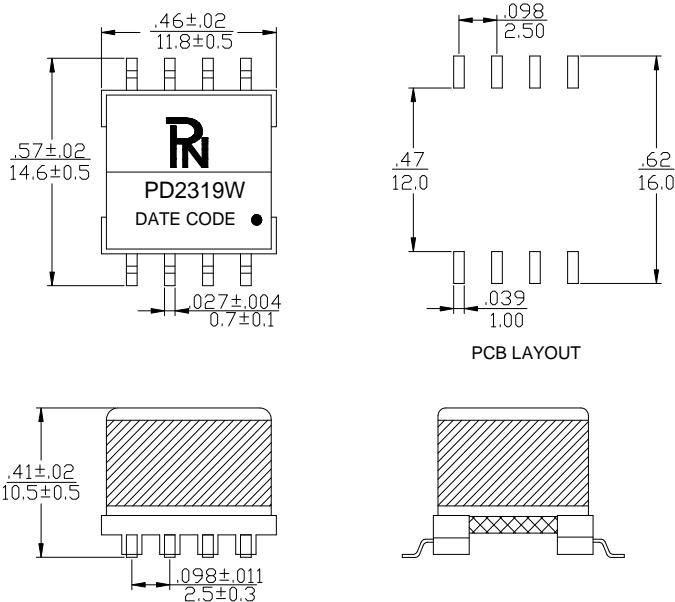

Schematics

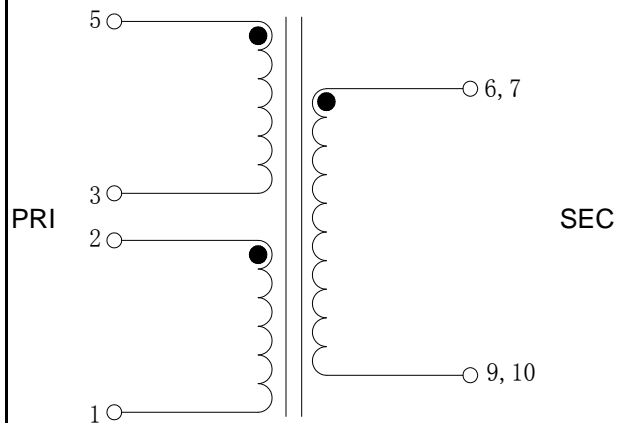

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868