


- Common Mode Choke inductance
- RoHS compliance product
- Rated inductance 5uH to 4.7mH
- Operating temperature range:0°C TO +70°C


### Electrical Specifications @ 25°C

P/N	IR (mA)	DCR (mΩ)	OCL ≤ 1mH 100KHz, 0.1V;	LL ≤ 11uH 1MHz, 0.1V;	Hi-Pot DC(V)
PD1231ENL	200	150	10	0.05	1000

### Dimensions (unit: inch/mm)

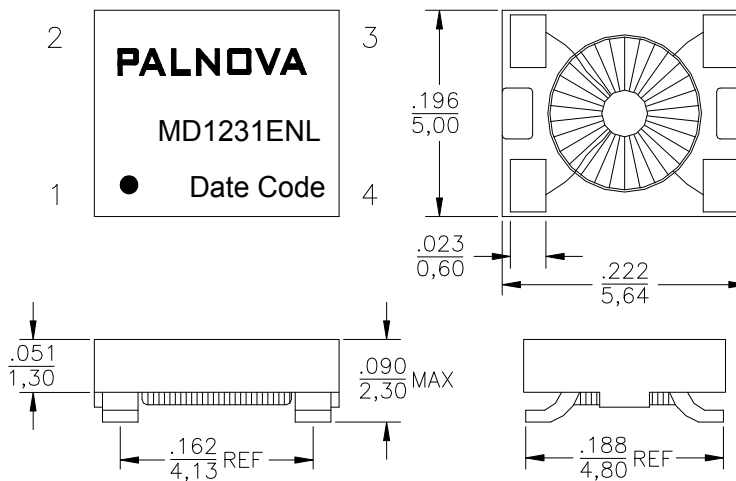

### Schematics:

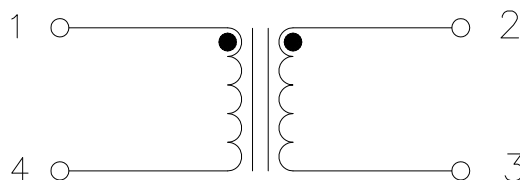

#### **TUSTIN OFFICE:**

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

#### **SANTA CLARA OFFICE:**

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868