







- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C



### Electrical Specifications @ 25°C


P/N	T/R (±2%)	OCL@50KHz 1.0V (mH ±10%)	LL@100KHz 0.1V (μH MAX)	Hi-pot (Vrms)
	(1-5):(7-6):(9-7):(10-9)	(1-5)	(1-5), (tie6+7+9+10)	PRI TO SEC
PP0496Q	88:4:3:3	1.25	90	3000
PP0972Q	88:7:3:1	1.24	60	3000

### Dimensions (unit: inch/mm)



CUT: Pin2,3,4,8

### Schematics

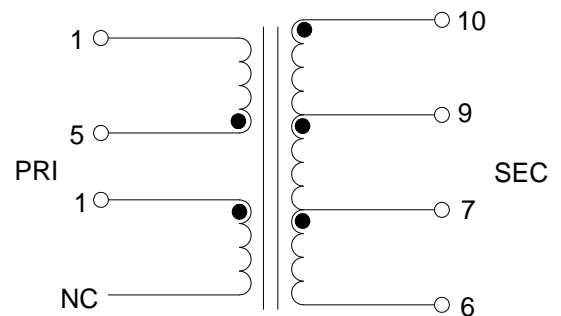

### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868