


- Large Current and Low DCR
- Magnetically shielded construction
- High frequency range up to 5.0 MHz.
- Low noise.
- Ultra low cost.
- Operating Temperature range: -55°C TO +125°C




Electrical Specifications @ 25°C

P/N	100KHz 0.25V	D.C.R. (mΩ)		Heat Rating Current	Saturation Current
	L0(μH) ±20% '@0A	Typical	Max	Irms (Amp) Typical	Isat (Amp) Typical
PDM 0620-2R2 M-S	2.2	38	43	5	8
PDM 0620-3R3 M-S	3.3	54	60	4	6
PDM 0620-100 M-S	10	130	140	2	3


Dimensions (unit: inch/mm)

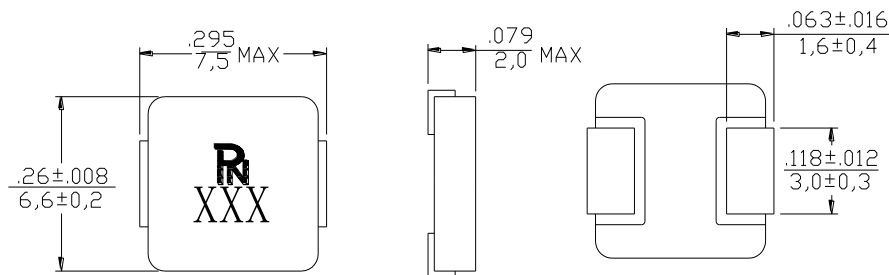

Recommended Layout: [unit: inch/ mm]



Schematics(continued)



TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

Milpitas OFFICE:

500 Yosemite Drive,
Milpitas, CA. 95035 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868