



- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 1500 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C




Electrical Specifications @ 25°C

| P/N | T/R (±2%) | OCL@100KHz 1.0V (μH±10%) | Hi-pot (Vrms) |
|----------|-------------------------|-------------------------------|------------------|
| | (1-2):(7-8):(6-7):(5-6) | (1-2) | PRI TO SEC |
| PP0613DA | 9:46:26:6 | 15 | 1500 |

Dimensions (unit: inch/mm)

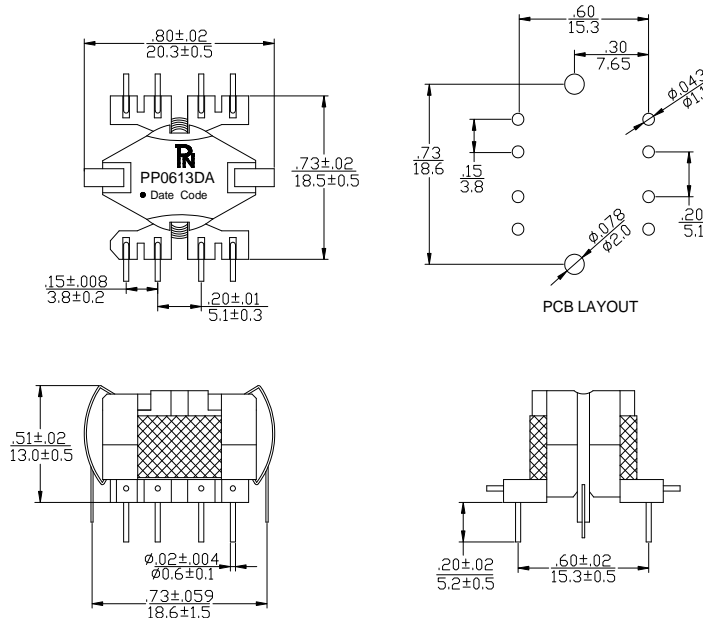

Schematics

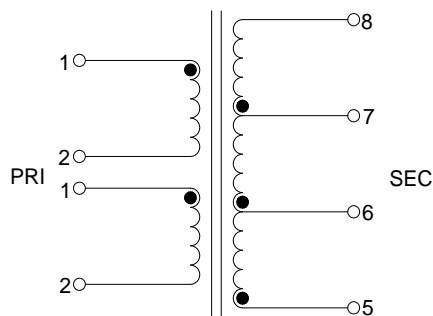

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin, California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara, California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868