



- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 1500 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C




Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@100KHz 1.0V (μH±10%)	Hi-pot (Vrms)
	(1-2):(7-8):(6-7):(5-6)	(1-2)	PRI TO SEC
PP0955V	9:64:26:6	15	1500

Dimensions (unit: inch/mm)

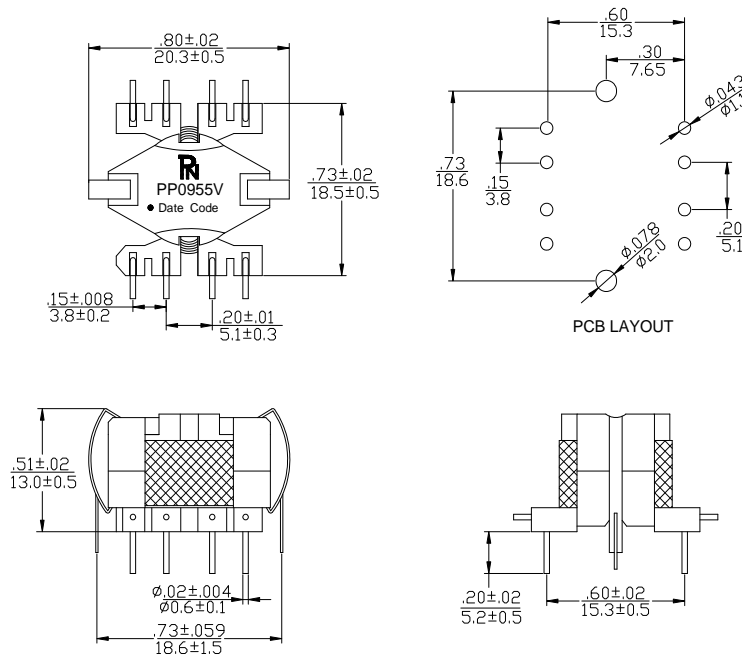

Schematics

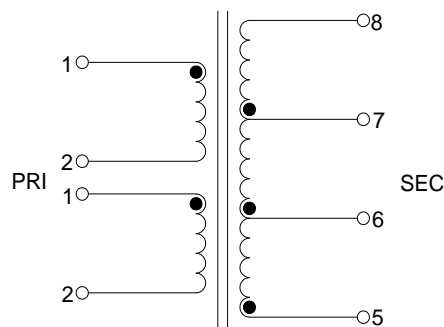

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868