

- Designed to meet UL 60950-1
- Ideally Used In POE Transformer
- Isolation 1500 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C




### Electrical Specifications @ 25°C

P/N	T/R (±1%)	OCL@ 100KHz 0.25V (μH ±10%)	LL@ 100KHz 0.1V (μH MAX )	Hi-pot (Vrms)
		(1-2):(4-5):(6,7-9,10)	(1-2)	(1-2),(tie4+5+6+7+9+10)
PD1628W	1.8:1:1±1%	100	0.875	1500


### Additional Specifications

P/N	D.C.R (mΩ MAX)		
	(1-2)	(6,7-9,10)	(4-5)
PD1628W	210	35	580

### Dimensions (unit: inch/mm)

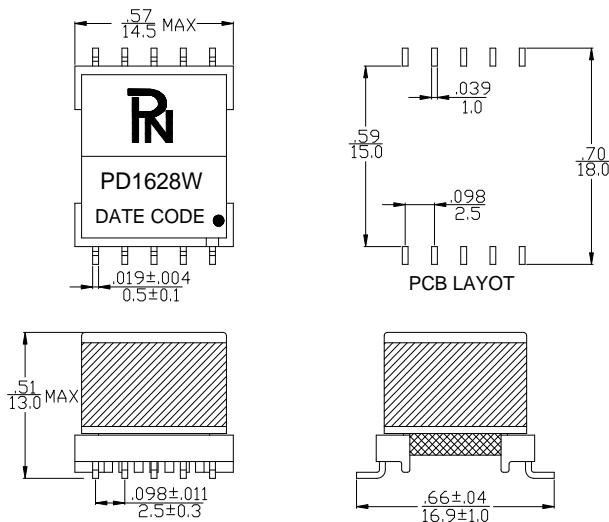

### Schematics

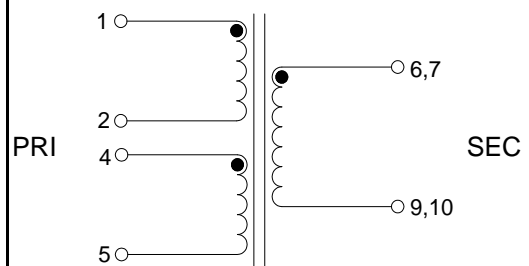

#### **TUSTIN OFFICE:**

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

#### **SANTA CLARA OFFICE:**

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868