


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C




Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@50KHz 1.0V (μH±10%)	LL@50KHz 1.0V (μH MAX)	D.C.R (Ω MAX)	Hi-pot (Vrms)
		(1-2):(4-5):(10-6,7):(6,7-8,9)	(4-5)	(4-5),(tie1+2+6+7+8+9+10))	(4-5)
PP0763K	10:80:5:3	800	30	2.5	3000

Dimensions (unit: inch/mm)

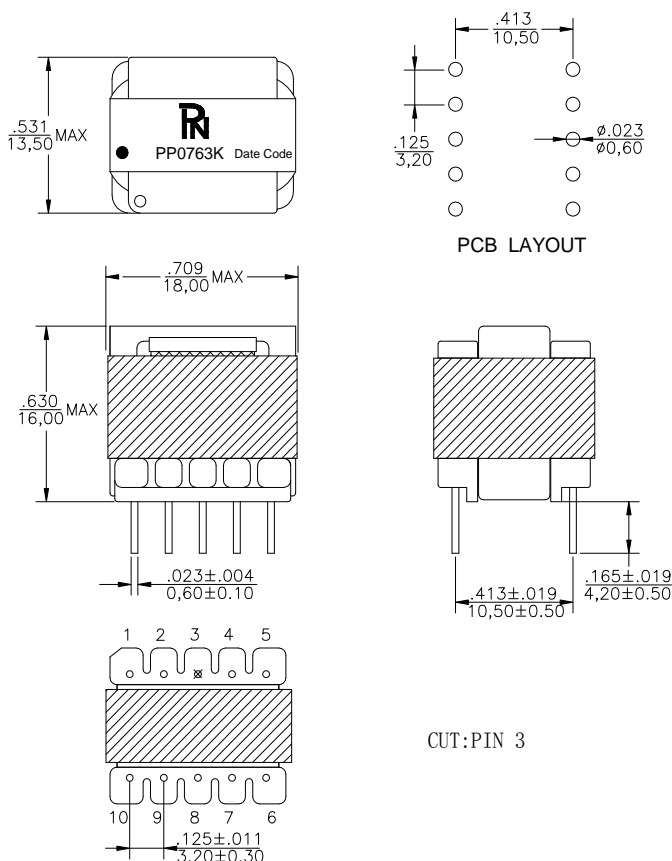

Schematics

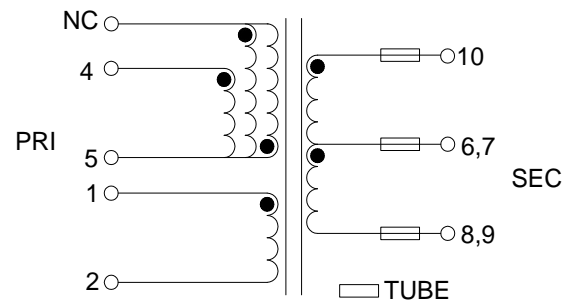

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868