


- Common mode chokes for telecom applications
- Excellent EMI performance
- Current capability up to 750mA
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C


Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@100KHz 0.1V (μH MIN)	DCR (Ω MAX)	Hi-pot Vrms
PS5441A	(1-8) : (3-6) : (4-5)	(1-8)	(1-8) =(3-6)=(4-5)	1-8 TO 3-4-5-6
	1:1:1	3300	1.6	700

Dimensions (unit: inch/mm)

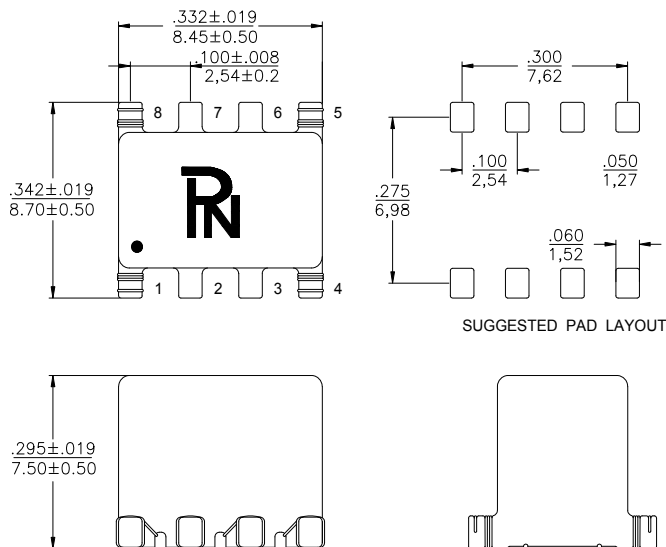

Schematics



TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868