


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C




### Electrical Specifications @ 25°C

P/N	T/R ( ±3%)	OCL@50KHz 1.0V ( mH ±10%)	LL@50KHz 1.0V (μH MAX )	D.C.R (Ω MAX)	Hi-pot (Vrms)
	(4-5):(3-2):(2-1):(7-6):(9-8)	(4-5)	(4-5) (tie1+2+3+6+7+8+9)	(4-5)	PRI TO SEC
PP2006Q	153:11:7:7:14	1.91	100	8.5	3000

### Dimensions (unit: inch/mm)

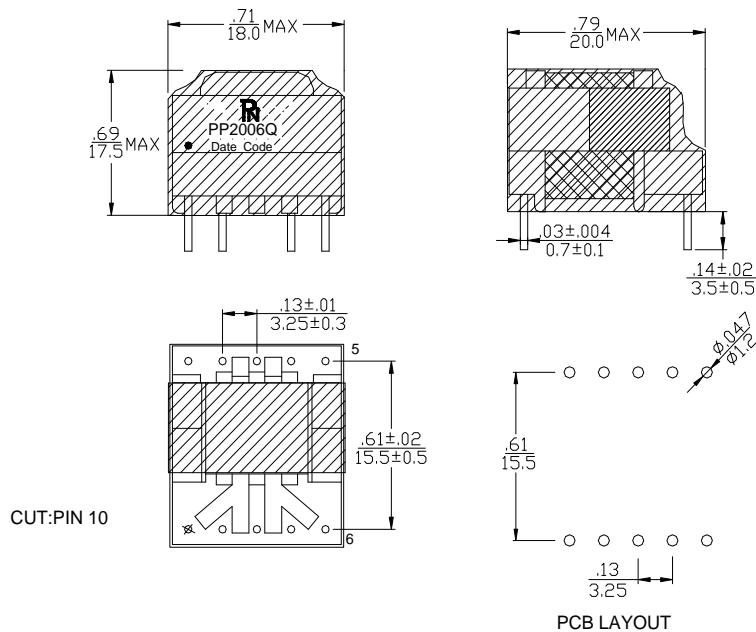

### Schematics

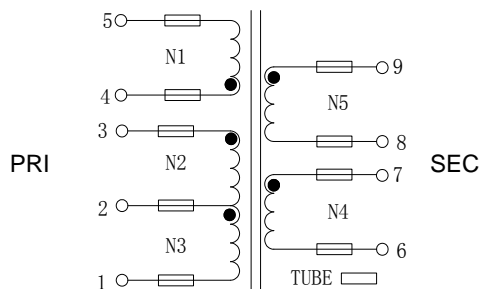

#### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

#### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868