


- Common Mode Choke inductance
- RoHS compliance product
- Rated inductance 5uH to 4.7mH
- Inductance tolerance(  $OCL \leq 0.47\text{mH} : \pm 30\%$ ,  
 $OCL \geq 0.47\text{mH} : -30\%/+50\%$ )
- Operating temperature range:  $0^{\circ}\text{C}$  TO  $+70^{\circ}\text{C}$


### Electrical Specifications @ 25°C

P/N	IR (mA)	DCR (mΩ)	$OCL \leq 1\text{mH}$ 100KHz, 0.1V; $OCL \geq 1\text{mH}$ 10KHz 0.1V (mH)	$LL \leq 11\mu\text{H}$ 1MHz, 0.1V; $LL \geq 11\mu\text{H}$ 100KHz 0.1V (uH)	Hi-Pot DC(V)
PS2304	1000	100	0.005	0.05	250

### Dimensions (unit: inch/mm)

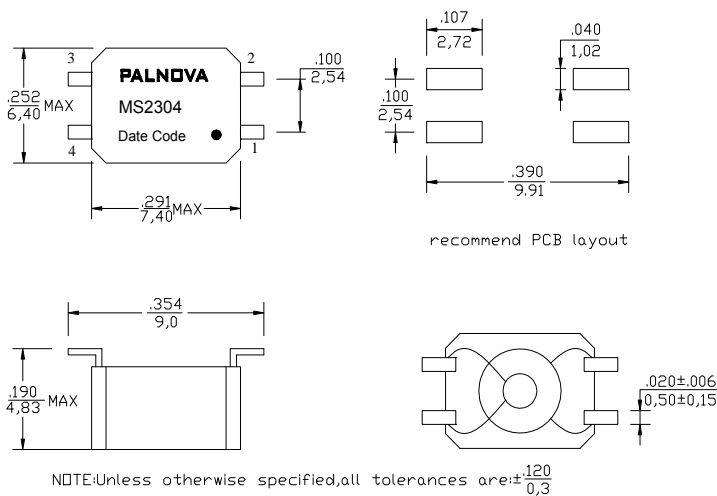

### Schematics



### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel: +1-714-460-0718 Fax: +1-714-460-0728

<http://www.palnova.com>

### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel: +1-408-855-8866 Fax: +1-408-855-8868