


- Large Current and Low DCR
- Magnetically shielded construction
- Current capability up to 3.59A
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C


Electrical Specifications @ 25°C

P/N	OCL@100KHz 0.1V ($\mu\text{H}\pm 20\%$)	D.C.R (m Ω MAX)	RATED CURRENT (A MAX)
PDRH63-1R0M	1	17	3.59
PDRH63-1R5M	1.5	21	2.93
PDRH63-2R2M	2.2	24	2.42
PDRH63-3R6M	3.6	33	1.89
PDRH63-4R7M	4.7	42	1.66
PDRH63-6R2M	6.2	50	1.45
PDRH63-100M	10	65	1.14
PDRH63-120M	12	72	1.04
PDRH63-150M	15	96	0.93
PDRH63-180M	18	102	0.85
PDRH63-220M	22	132	0.77
PDRH63-270M	27	160	0.70
PDRH63-330M	33	180	0.63
PDRH63-390M	39	200	0.58
PDRH63-470M	47	250	0.53
PDRH63-560M	56	300	0.48
PDRH63-680M	68	360	0.44
PDRH63-820M	82	450	0.40
PDRH63-101M	100	560	0.36
PDRH63-151M	150	750	0.31

Dimensions (unit: inch/mm)

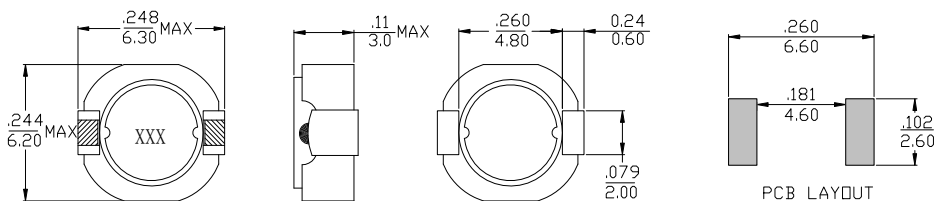

Schematics



TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868