


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 500 Vrms
- Recommended solder profile: Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +85°C




### Electrical Specifications @ 25°C

P/N	T/R				OCL @ 100KHz 0.1V (μH MAX)	Hi-pot (Vrms)  PRI TO SEC
	(1-8):(2-7)	(1-8):(8-2)	(1-8):(3-5)	(1-8):(5-4)		
PD0435F	1:1	1:1	1:0.38	1:0.38	3.38	500


### Additional Specifications

P/N	D.C.R (mΩ MAX)			
	(3-5)	(2-1)	(8-7)	(12,11-10,9)
PD0435F	190	1000	650	50

### Dimensions (unit: inch/mm)

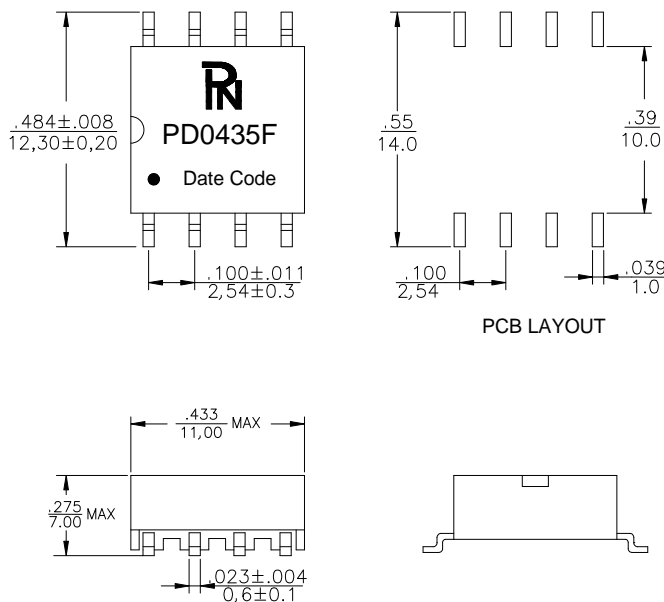

### Schematics

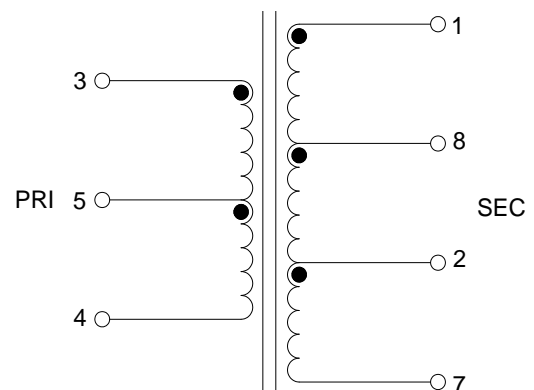

### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868