


- Common mode chokes for telecom applications
- Excellent EMI performance
- Current capability up to 0.85A
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40 °C TO +85 °C

Electrical Specifications @ 25°C


P/N	T/R	OCL@10KHz 0.02V (mH±40%)	DCR mΩ MAX	Reted Current (A MAX)	Hi-Pot Vrms
PS8551	(1-2):(4-3)	(1-2)=(4-3)	(1-2)=(4-3)	(1-2)=(4-3)	(1-2) TO (4-3)
	1:1 ±2%	3.9	550	0.75	500

Dimensions (unit: inch/mm)

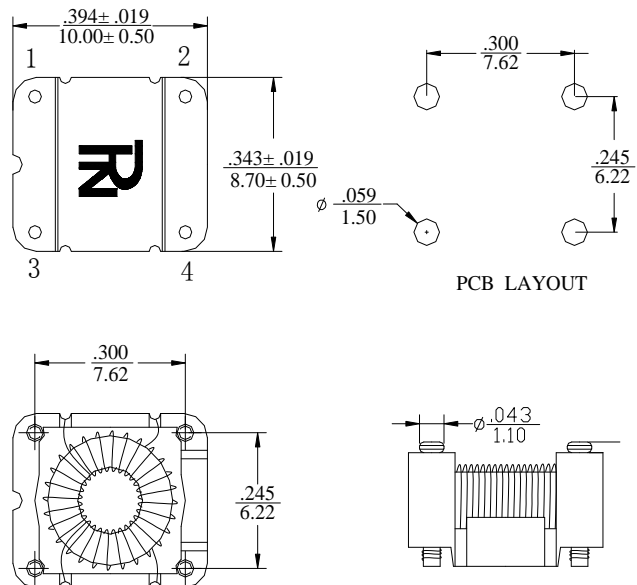

Unless otherwise specified , all tolerances are: $\pm \frac{.012}{0.30}$

Schematics

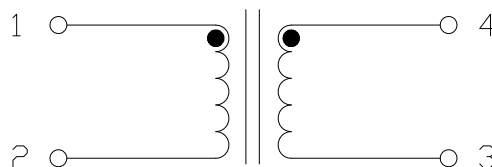

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868