



- Common Mode Choke inductance
- RoHS compliance product
- Rated inductance 5uH to 4.7mH
- Operating temperature range:0°C TO +70°C

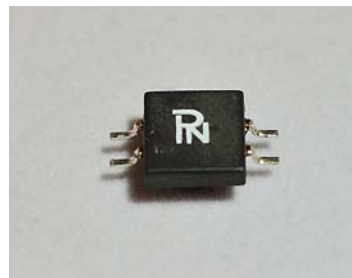


Electrical Specifications @ 25°C

P/N	IR (mA)	DCR (mΩ)	OCL ≤ 1mH 100KHz, 0.1V; OCL ≥ 1mH 10KHz 0.1V (mH)	LL ≤ 11uH 1MHz, 0.1V; LL ≥ 11uH 100KHz 0.1V (uH)	Hi-Pot DC(V)
PS1152	200	700	4.7	0.05	1000

Dimensions (unit: inch/mm)

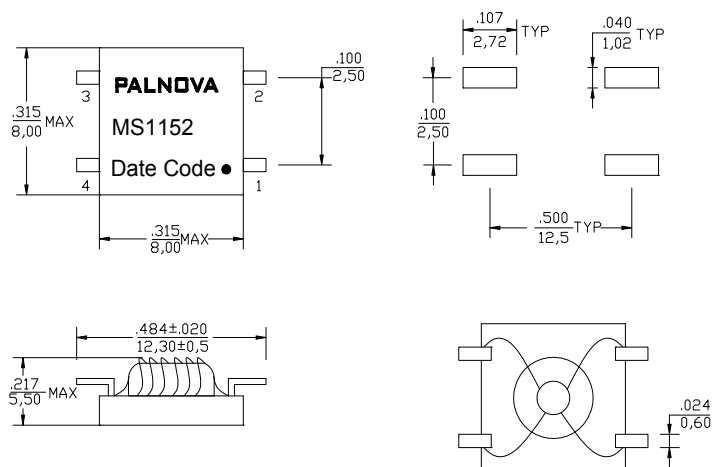

Schematics:

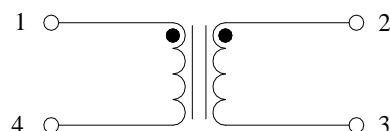

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868