


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 500 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +85°C




Electrical Specifications @ 25°C

P/N	T/R (±2%)					OCL @ 100KHz 1.0V (μH ±10%)
	(1-12):(2-11)	(1-12):(4-9)	(1-12):(5-8)	(1-12):(6-7)	(1-12) : (3-10)	(1-12)
PD0815E	1:1	1:1.375	1:1.375	1:2	1:1	9.9


Additional Specifications

P/N	D.C.R (mΩ MAX)					Hi-pot (Vrms)
	(1-12)	(4-9)	(6-7)	(3-10)	(2-11) (5-8)	PRI TO SEC
PD0815E	45	90	140	50	45 90	500

Dimensions (unit: inch/mm)

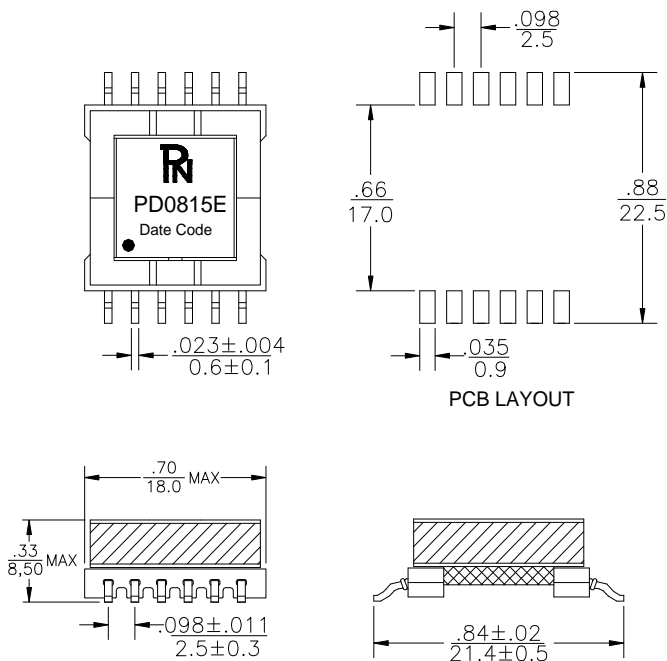

Schematics

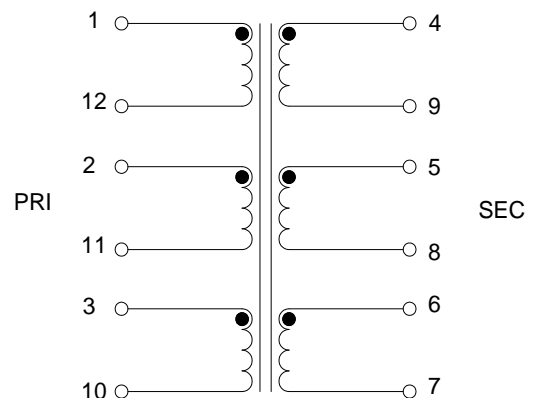

TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868