


- Common mode Chokes
- Suppression of common mode noise
- Current capability up to 750mA
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C


### Electrical Specifications @ 25°C

| P/N     | T/R           | OCL @1KHz 0.25V | DCR         | Hi-Pot          |
|---------|---------------|-----------------|-------------|-----------------|
| PP1270W | (1-2) : (3-4) | (1-2)=(3-4)     | (1-2)=(3-4) | (1-2) TO (3-4)  |
|         | 1:1           | 22mH MIN        | 3.7Ω        | 1500V AC 1mA 2s |

### Dimensions (unit: inch/mm)

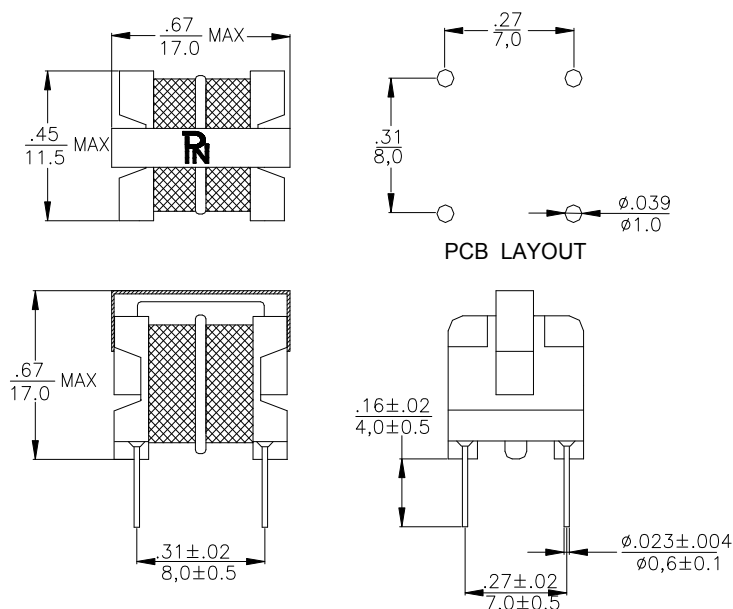

### Schematics

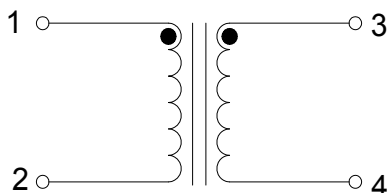

#### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel: +1-714-460-0718 Fax: +1-714-460-0728

<http://www.palnova.com>

#### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel: +1-408-855-8866 Fax: +1-408-855-8868