


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 1500 Vrms
- Recommended solder profile: Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +85°C




### Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL @ 100KHz 1.0V (μH ±5%)	LL @ 100KHz 1.0V (μH MAX)
		(3-5):(2-1):(12,11-10,9):(8-7)	(3-5)
PD1067W	44:20:9:20	100	2.05


### Additional Specifications

P/N	D.C.R (Ω MAX)				Hi-pot (Vrms)
	(3-5)	(2-1)	(8-7)	(12,11-10,9)	PRI TO SEC
PD1067W	0.76	1.1	0.15	0.101	1500

### Dimensions (unit: inch/mm)

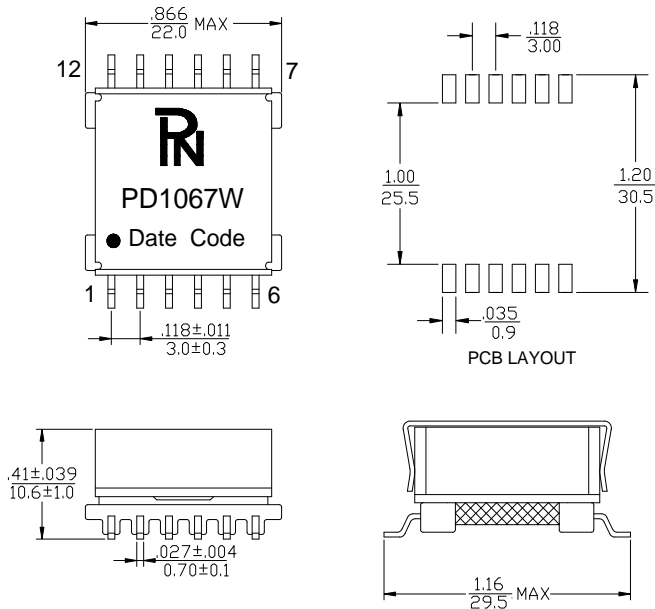

### Schematics

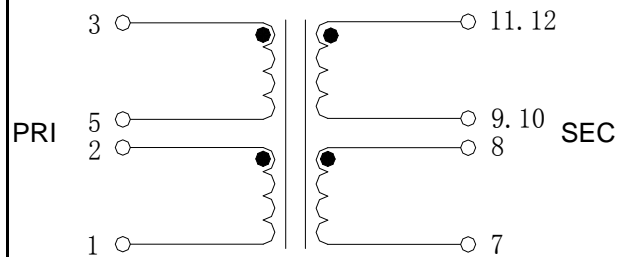

#### TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,  
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

#### SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,  
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868