


- Large Current and Low DCR
- Magnetically shielded construction
- High frequency range up to 5.0 MHz.
- Low noise.
- Ultra low cost.
- Operating Temperature range: -40°C TO +125°C




Electrical Specifications @ 25°C

P/N	100KHz 0.25V	D.C.R (mΩ)		Heat Rating Current	Saturation Current
	L0(μH) ±20% @0A	Typical	Max	I _{dc} (Amp) Typical	I _{sat} (Amp) Typical
PDM 0420-R10 M-S	0.1	3.5	4.0	12	22
PDM 0420-R22 M-S	0.22	6.0	6.6	9	12.5
PDM 0420-R47 M-S	0.47	13	14	7	10
PDM 0420-R56 M-S	0.56	14	16	6	8
PDM 0420-R68 M-S	0.68	20	21	5.2	8
PDM 0420-1R0 M-S	1.0	24	27	4.5	7
PDM 0420-1R5 M-S	1.5	38	46	4	6
PDM 0420-2R2 M-S	2.2	52	58	3	5
PDM 0420-3R3 M-S	3.3	74	87	2.5	4
PDM 0420-4R7 M-S	4.7	105	126	2.2	3
PDM 0420-6R8 M-S	6.8	112	135	2	3
PDM 0420-8R2 M-S	8.2	205	216	2	2
PDM 0420-100 M-S	10	220	264	2	2


Dimensions (unit: inch/mm)

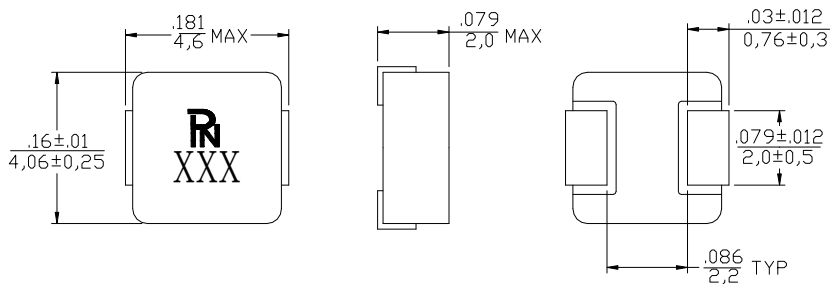

Recommended Layout: [unit: inch/ mm]



Schematics(continued)



TUSTIN OFFICE:

15991 Red Hill Avenue, Suite #102, Tustin,
California 92780 USA

Tel:+1-714-460-0718 Fax:+1-714-460-0728

<http://www.palnova.com>

SANTA CLARA OFFICE:

3000 Kenneth Street, Santa Clara,
California 95054 USA

Tel:+1-408-855-8866 Fax:+1-408-855-8868